


Temperature Verification Kiosk

Our temperature verification system provides the ability to screen employees and guests via an infrared body temperature camera. The solution can also be programmed for facial identification, with users easily added in a few short clicks. Designed to help protect the health and safety of both employees and guests by preventing anyone with a temperature from entering a facility. Alarms can be added to sound when those above the temperature threshold and those without access attempt to enter.

- **Wall-mountable or freestanding with pedestal or desk mount.**
- **Pass or Fail visual and audio alerts**
- **2 million pixel camera**
- **2.5W/4R speakers**

Additional Features & Details

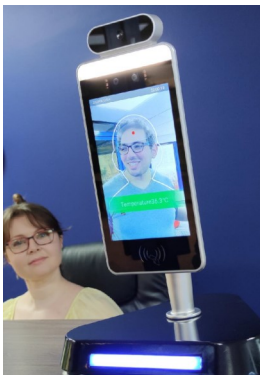

⇒ 8-inch IPS full-view LCD display.

⇒ 10/100Mbps self-adaptive Ethernet port & USB Port

⇒ Industrial-class appearance, waterproof & dustproof design which is stable & reliable

⇒ Supports 20,000 face database. The 1:1 comparison recognition rate is more than 99.7%, the 1:N comparison recognition rate is more than 96.7%@0.1% misrecognition rate, and the live detection accuracy rate is 98.3%@1% misrecognition rate. Face recognition pass speed is less than 1 second.

⇒ Supports accurate face recognition and comparison while wearing a mask.

⇒ Using industrial-grade binocular wide dynamic camera, night infrared and LED dual photo flood lamp.

⇒ Supports human body temperature detection and temperature display. The best temperature detection distance is 0.5 meters. The longest distance at which body temperature can be measured is 1 meter. The measurement error is plus/minus 0.5ºC

HBM INC

808 Main Street PO Box 751 Jasper, IN 47547

800-433-6476 812-482-3736 hbmsales@hoosierbusinessmachines.com